




More Precision

optoCONTROL // Optical precision micrometers



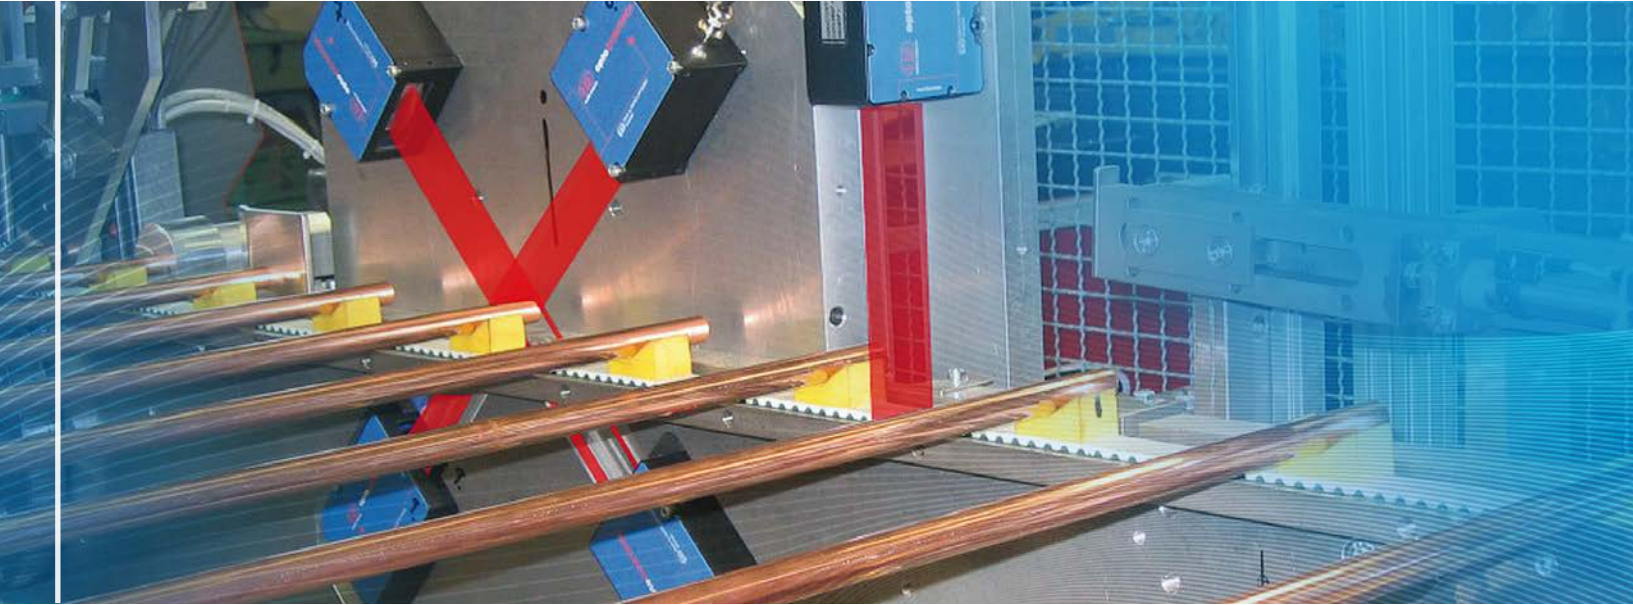

- ▶ High accuracy and measuring rate
- ▶ Resolution from $0.1\mu\text{m}$
- ▶ Measurement objects from 0.02mm
- ▶ Wear-free measurement for long service life
- ▶ Different models for numerous application areas

Optical precision micrometers


Micrometers from Micro-Epsilon operate according to the ThruBeam principle. Here, the transmitter produces a parallel light curtain that is transmitted via a lens arrangement into the receiving unit. The beam is interrupted if there is an object in the light path. The shadowing generated by this object is recorded by the receiving optical system and output as a geometric value.

Several types of ThruBeam technology are used across the four different sensor models in the range so as to cover as wide a field of applications as possible.

Optical micrometers can be used for dimensional measurements in production, quality assurance and service tasks. Factors such as the diameter, gap, height, position and also the received amount of light or opacity can be measured.

Wear-free and long service life

All optoCONTROL sensors function without a rotating mirror and so are completely wear-free. The parallel light curtain is produced by a special lens arrangement in the light source (transmitter). High quality components in the receiving optical system, e.g. filter and lenses, enable high accuracies to be achieved. Therefore, the optoCONTROL micrometers are ideally suited to applications in which high precision and complete reliability are required.

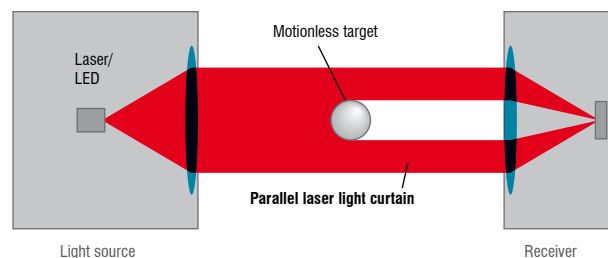

optoCONTROL - wear free thrubeam micrometers:
High speed real time consistent data enables true precision profile without distortion. The product range contains models with CCD and light quantity measurement for various applications.

	Measuring ranges	Measurement mode	Page
optoCONTROL 1200	Measuring range up to 30mm		4 - 5
optoCONTROL 1202	Measuring range up to 98mm		6 - 7
optoCONTROL 1220	Measuring range up to 28mm		8 - 9
optoCONTROL 2500	Measuring range up to 34mm		10 - 11
optoCONTROL 2520	Measuring range up to 46mm		12 - 13
optoCONTROL 2600	Measuring range up to 40mm		14 - 15


Flexible in use

Micrometers are primarily used as part of the manufacturing process and quality control of a production line, measuring continuous material, as well as single parts. The relevant technologies used here, such as laser intensity measurements and CCD chip imaging, are suitable for a wide variety of applications.

The compact models in the optoCONTROL product family work for production line applications and for integration into machine tools and other production machinery. High measuring rates ensure a high, continuous production rate.



Diameter of a pulley

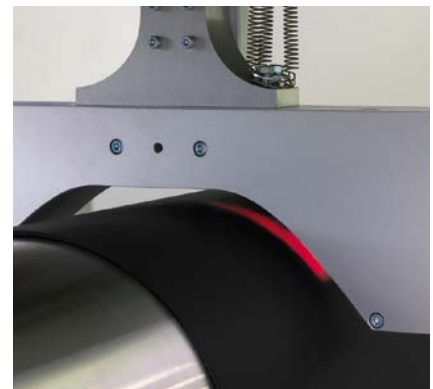


Thickness measurement of flat plastic film and rubber strips

Special application areas

The optoCONTROL 2500 and 2600 model ranges can be modified for customer specific applications, for example:

- Carry case version for service tasks
- Customized cable lengths, modified cable outlet
- Version with reduced light source to receiver gap
- Version with deflection mirror for installation in tight spaces
- Customer-specific software, e.g. measurement programs, statistics (only for ODC2600)
- Customer-specific linearity adjustment

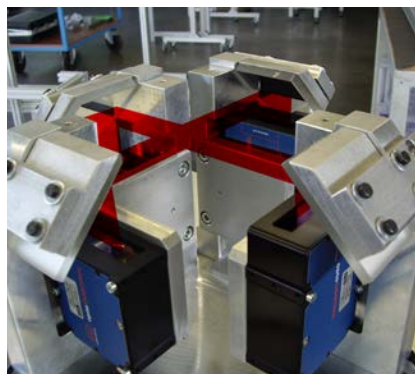

Measuring system detects the X/Y position of the needle in an industrial sewing machine



Bearing shell detection in automotive manufacturing



	Measuring range 2 - 30mm
	Resolution $\geq 10\mu\text{m}$
	Frequency response up to 100kHz (-3dB)
	Analog output 0 ... 10VDC
	Laser class 1

- ▶ High quality glass lense optics
- ▶ Robust and compact design with integrated controller
- ▶ Limit switch with up to 60kHz switching frequency
- ▶ Axial and radial design

Measuring principle


The optoCONTROL 1200 is based on the principle of light quantity measurement. The light of a red laser diode is spread out by a lens to a parallel light curtain which is aimed at the receiving unit. In the receiving unit, the light is guided via various filters and lenses through a precision shutter to a light-sensitive detector. The amount of occurring light is provided by analog electronics and output as an analog signal.

System design

optoCONTROL 1200 consists of a light source and a receiving unit. The complete controller electronics are integrated in the receiver housing. The light source and receiver can be installed at any distance up to 5 meters from each other. All models can be installed without additional brackets in both vertical and horizontal positions. The compact design of the housing and the 90° version also enable easy mounting of the miniature micrometers in tight installation spaces.

As well as the analog output, an adjustable limit switch is also available. This can be operated both as NPN (bright switching) as well as in PNP logic (dark switching).

Measurement mode

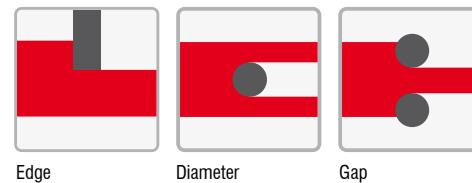


Edge

Diameter

Gap

The target must be positioned inside the measuring window for the diameter measurement. Smallest diameter typ. $>0.3\text{mm}$. For gap measurement from 50 - 400 μm there is an option using light quantity measurement.

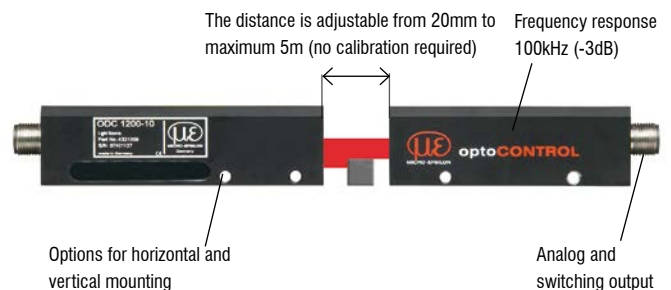

optoCONTROL 1200/90:
Version with 90° beam path for mounting in tight spaces



Model	ODC1200 (axial model)				ODC 1200/90 (90° model)				ODC1201		
Measuring range	2mm	5mm	10mm	16mm	2mm ²⁾	5mm	10mm	16mm	20mm	30mm	
Distance light source - receiver (free space) ¹⁾	min. 20mm to max. 5m										
Linearity	≤2% FSO		≤3,5% FSO		≤2% FSO		≤3,5% FSO				
Resolution (dynamic) typ.	10µm	25µm	50µm	80µm	10µm	25µm	50µm	80µm	100µm	150µm	
Frequency response	100kHz (-3db)										
Light source	semiconductor laser <0.39mW, 670nm (red, laser class 1)										
Permissible ambient light	≤ 5000lx ³⁾										
Analog output	0 ... 10VDC (adjustable gain)										
Temperature drift of the analog output	≤130mV (at 10 - 50°C)										
Switching output	PNP dark switching and NPN bright switching (max. switching frequency 60kHz) adjustable signal threshold										
Shock	15g / 6ms										
Vibration	15g / 10Hz...1kHz										
Operation temperature	0 ... 50°C										
LED display	Switching state and dusty optics										
Storage temperature	-20 ... 70°C										
Operation voltage	12-32VDC, reverse polarity protection										
Mounting holes	straight up					M4 x 5mm				ø4.1mm	
	horizontal					M5 x 8mm				M4 x 6mm	
Weight (without cable)	light source	appr. 150g				appr. 170g				appr. 260g	
	receiver	appr. 120g				appr. 160g				appr. 220g	
Protection class	IP 67										

FSO = Full Scale Output

The quoted data apply for a constant room temperature of 20°C after a warm-up period of 30min, in the range 10 ... 90% of the analog output at a distance between light source and receiver of 0.5m.


Analog offset <0.05V

¹⁾ Increasing the distance, the measurement of hot targets is possible without damaging the controller electronics


²⁾ For gap measurements 50 - 400µm there is an controller option available: thru-beam operation with distances up to 700mm

³⁾ Shadowing from ambient daylight increases the signal stability


optoCONTROL 1200

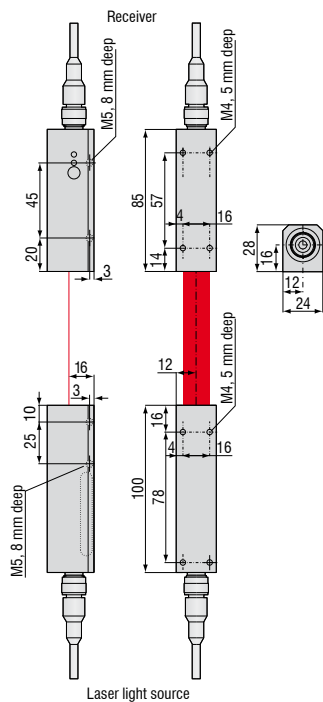

optoCONTROL 1200/90

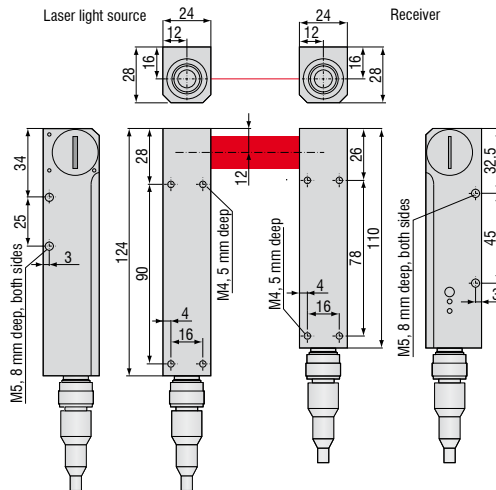

optoCONTROL 1201

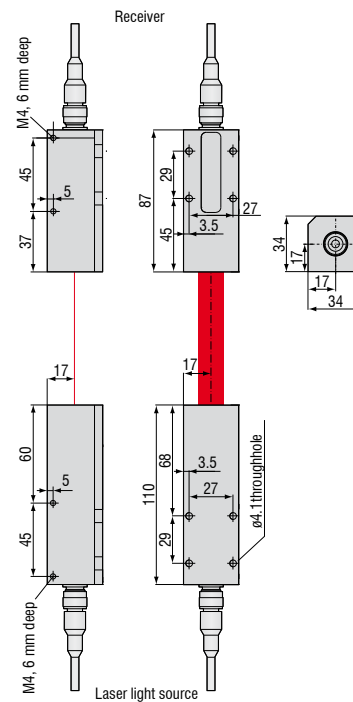



	Measuring ranges 75 and 98mm
	Resolution $\geq 8\mu\text{m}$
	Measuring rate up to 400Hz
	Analog output 0 ... 10 VDC
	Serial interface RS232
	Laser class 1

- ▶ High resolution CCD array detector with integrated controller
- ▶ Sub-pixel evaluation
- ▶ Measuring distance selectable from 20 to 2000mm
- ▶ Integrated polarisation filter / interference filter
- ▶ 2 digital inputs
- ▶ 3 digital outputs (limit switch)
- ▶ ODC1202-Tool software included

Measuring principle


The laser beam for the optoCONTROL 1202 laser micrometers is output from the optical transmitter as a parallel aimed laser beam. The laser line strikes a CCD array in the receiving optical system. The amount of light collected by each of these receiving elements during the integration time is read out separately as analog voltage and stored as a digital value in a data field after analog-to-digital conversion.

If there is a non-transparent measurement object in the laser line, only the receiving elements of the lines outside the shadow zone of the measurement object are illuminated. As the spacing of the pixels of the CCD array is known, the size and position of the measurement object can be determined.

System design

optoCONTROL consists of a light source and a receiving unit. The complete controller electronics are integrated in the receiver housing. The light source and receiver can be installed at any distance from each other. All models can be installed without additional brackets in both the vertical and horizontal positions.

Measurement mode (programmable via software)

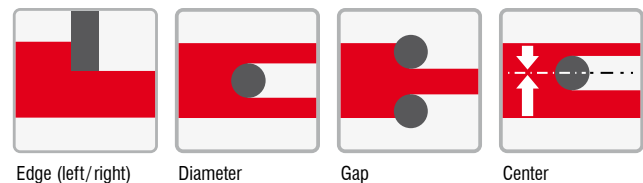


Edge (left/right)

Diameter

Gap

Center

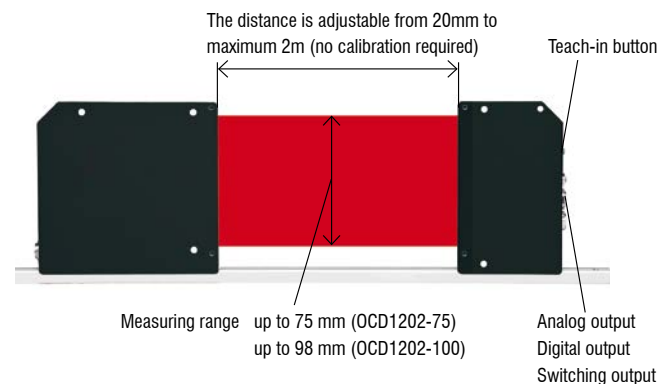


Model	optoCONTROL 1202-75	optoCONTROL 1202-100
Measuring range	typ. 75mm	typ. 98mm
Distance light source - receiver	minimal 20mm, maximal 2000mm	
Resolution	typ. 8 μ m ¹⁾	typ. 8 μ m ¹⁾
Repeatability	$\leq 10\mu$ m	$\leq 10\mu$ m
Linearity	$\leq 0.2\%$ ($\leq 150\mu$ m)	$\leq 0.2\%$ ($\leq 196\mu$ m)
Measuring rate	max 400Hz / 700Hz (digital)	max 360Hz / 600Hz (digital)
Max. switching current	100mA, short-circuit proof	
Interface	RS232, programmable using Windows	
Laser	Semiconductor laser, 670nm, DC-operation, $\leq 0,39$ mW max opt. power, laser class 1, the use of these laser sensors therefore requires no additional protective measures	
Permissible external light	≤ 5000 Lux ²⁾	
Optical filter	interference filter, red light filter RG630, polarization filter	
Housing material	aluminium, anodised in black	
Connector receiver	8-pin female connector type binder series 712 (SPS/Power); 4-pin female connector type binder series 707 (PC/RS232) 3-pin female connector binder series 712 (connection to the light source)	
Connector light source	3-pin female connector type binder 712 (connection to receiver)	
Connection cable	Connection to PC: SCD12xx (USB version incl. driver); connection serial interfaces: SCD1202; connection analog and Power: SCA1202; connection cable light source/receiver: CE1202	
Output polarity	bright-/dark-switching, adjustable using Windows	
Teach button	Teach button at the housing for set point value teaching	
LED- indication	LED red (+): measured value > upper tolerance threshold; LED green: measured value lies within tolerance window LED red (-): measured value < lower tolerance threshold; LED yellow: multifunction	
EMC	IEC 60947-5-2	
Shock	15g / 6ms	
Vibration	15g / 10Hz...1kHz	
Protection class	electronics IP 54, optics: IP 67	
Operation temperature	-10°C to +50°C	
Storage temperature	-20°C to +85°C	
Output	analog	0 ... +10V (scalable)
	digital	(OUT0, OUT1, OUT2): pnp bright-switching/npn dark-switching or pnp dark-switching/npn bright-switching, adjustable using Windows, 100mA, short-circuit proof
Digital input	IN0	external trigger, input voltage +Ub/0V with protective circuit
	IN1	teach/reset, input voltage +Ub/0V with protective circuit
Power supply	+15VDC ... + 30VDC	
Sensitivity adjustment	using Windows via PC (parameterization software included)	
Laser adjustment	adjustable using Windows via PC	
Consumption	typ. 200mA	

The quoted technical data apply for a displacement light source to receiver about 800mm and a temperature of 20°C.

¹⁾ Display resolution of the software $\geq 10\mu$ m

²⁾ Shadowing from ambient daylight increases the signal stability

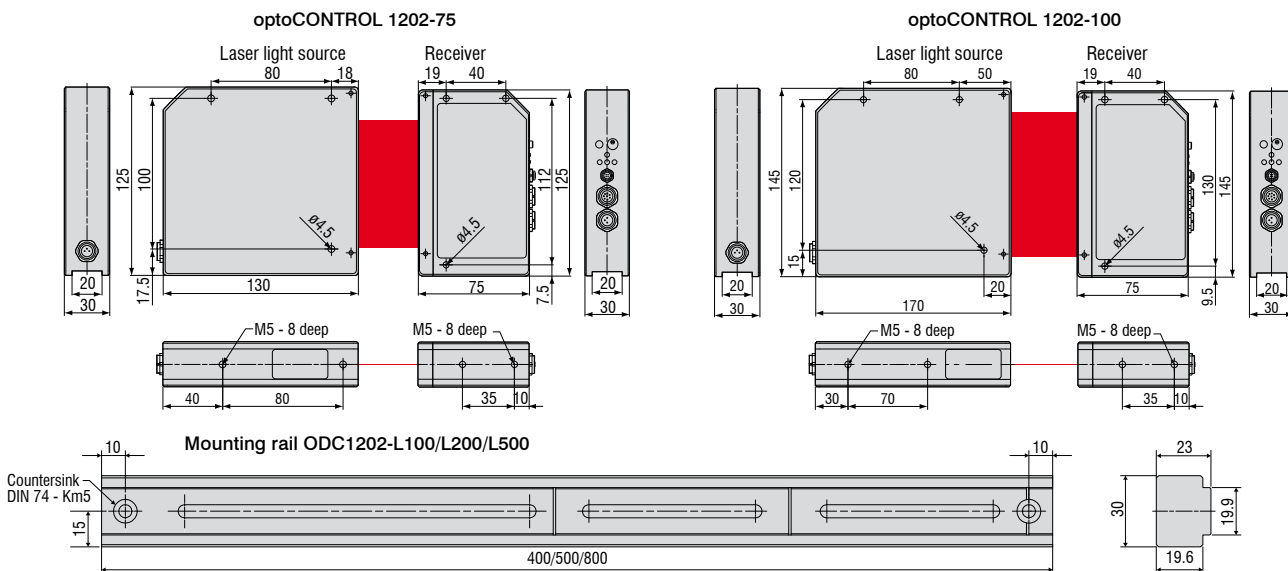



	Measuring range 28mm
	Resolution typ. 2µm
	Repeatability typ. ≤4µm
	Analog output 0 ... 10VDC
	Serial interface RS232
	Laser class 1

- ▶ Visible laser line (red light 670nm)
- ▶ Working distance of up to 2,000mm
- ▶ Integrated interference filter
- ▶ CCD line detector with 2,048 pixels, 16,384 sub-pixels (8-fold)
- ▶ 2 digital inputs, 2 digital outputs
- ▶ Robust aluminium housing suitable for industrial use

Measuring principle


The laser beam for the optoCONTROL 1220 laser micrometers is output from the optical transmitter as a parallel aimed laser beam. The laser line strikes a CCD array in the receiving optical system. The amount of light collected by each of these receiving elements during the integration time is read out separately as analog voltage and stored as a digital value in a data field after analog-to-digital conversion.

If there is a non-transparent measurement object in the laser line, only the receiving elements of the lines outside the shadow zone of the measurement object are illuminated. As the spacing of the pixels of the CCD array is known, the size and position of the measurement object can be determined.

System design

optoCONTROL 1220 series is specifically designed for measuring edges, diameters and gaps of up to 2,000mm. The laser micrometer consists of a light source and a receiving unit. The complete controller electronics are integrated in the receiver housing. The light source and receiver can be installed at any distance from each other. All models can be installed without additional brackets in both vertical and horizontal positions.

Measurement mode (programmable via software)

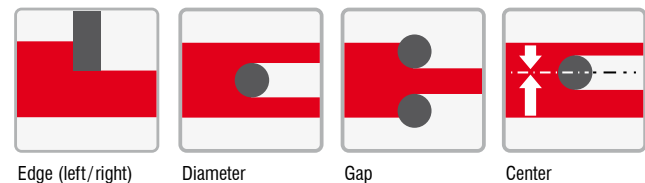


Edge (left/right)

Diameter

Gap

Center

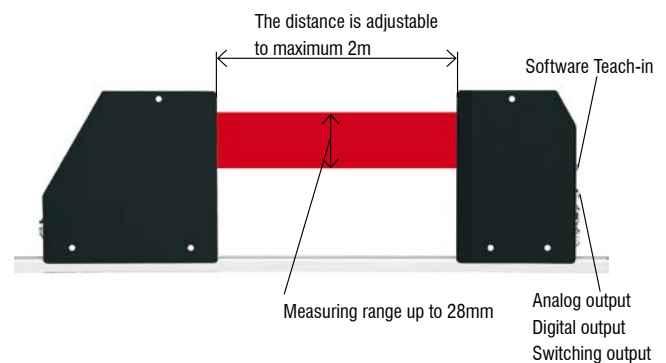

The distance is adjustable to maximum 2m

Software Teach-in

Measuring range up to 28mm

Analog output
Digital output
Switching output


Model	ODC1220-28
Laser	semiconductor laser, 670nm, DC-operation, $\leq 0.39\text{mW}$ max. opt. power, laser class 1 ¹⁾ the use of these laser sensors therefore requires no additional protective measures
Distance light source - receiver	up to 2000mm
Measuring range	typ. 28mm
Resolution	typ. $2\mu\text{m}$
Repeatability ^{3) 2)}	typ. $\leq 4\mu\text{m}$
Linearity	typ. $\leq 0.08\%$ [typ. $\leq 22\mu\text{m}$]
Measuring rate	max. 200Hz
Optical filter	interference filter, RG645; polarisation filter
Analog output (ANA)	1x voltage output 0 ... +10V (scalable)
Digital outputs (OUT0, OUT1)	OUT0: (-) measured value < lower tolerance threshold; OUT1: (+) measured value > upper tolerance threshold pnp bright-switching/npn dark-switching or pnp dark-switching/npn bright-switching, adjustable using Windows®, 100mA, short-circuit proof
Digital inputs (IN0, IN1)	IN0: external trigger, IN1: teach/reset (double function); input voltage +Ub/0V with protective circuit
Voltage supply	+24VDC ($\leq 10\%$)
Sensitivity adjustment	using Windows® via PC
Laser adjustment	adjustable under Windows® via PC
Consumption	typ. 200mA
Protection class	electronics: IP54, optics: IP67
Operation temperature range	-10°C ... +50°C
Storage temperature range	-20°C ... +85°C
Housing material	aluminium, anodised in black
Connector receiver	8-pin female connector type binder series 712 (SPS/Power); 4-pin M5 female connector type binder series 707 (RS232/PC); 4-pin female connector type binder series 712 (connection to the light source)
Connector light source	4-pin female connector type binder 712 (connection to receiver))
LED-indication	LED red (+) : measured value > upper tolerance threshold; LED green : measured value lies within tolerance window LED red (-) : measured value < lower tolerance threshold; LED yellow : Power-LED (multifunction)
EMC	IEC 60947-5-2
Max. switching current	100mA, short-circuit proof
Interface	RS232, programmable using ODC1202-Tool software (included)
Connection cable	connection to PC: SCD1202 (RS232) or SCD12xx (USB version incl. driver) Power and connection to SPS: SCA1202; connection cable light source/receiver: CE1220
Mounting rail	ODC1220-L220 (max. distance light source - receiver $\leq 220\text{mm}$)
Output polarity	bright-/dark-switching, adjustable using Windows

¹⁾ Laser class 1: IEC 60825-1: 2008-05


²⁾ Valid for $\Delta T \leq 5^\circ\text{C}$ and ambient light 5000lx. For stable measurement shadowing of the receiver is advisable. Smooth video AVG 64 values.


ODC1220-28-T (light source)

ODC1220-28-R (receiver)

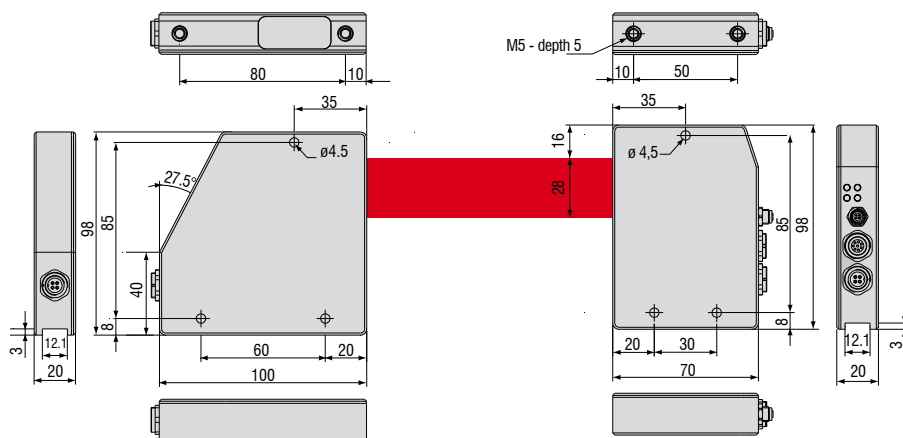

Mounting rail ODC1220-L220/L420/L620

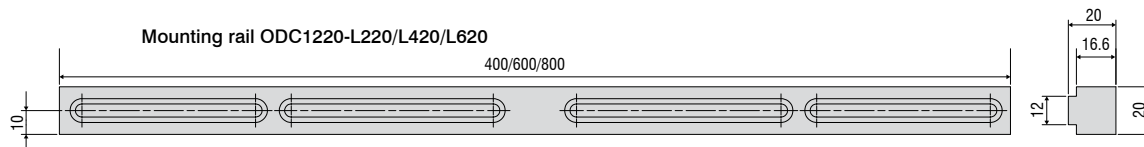

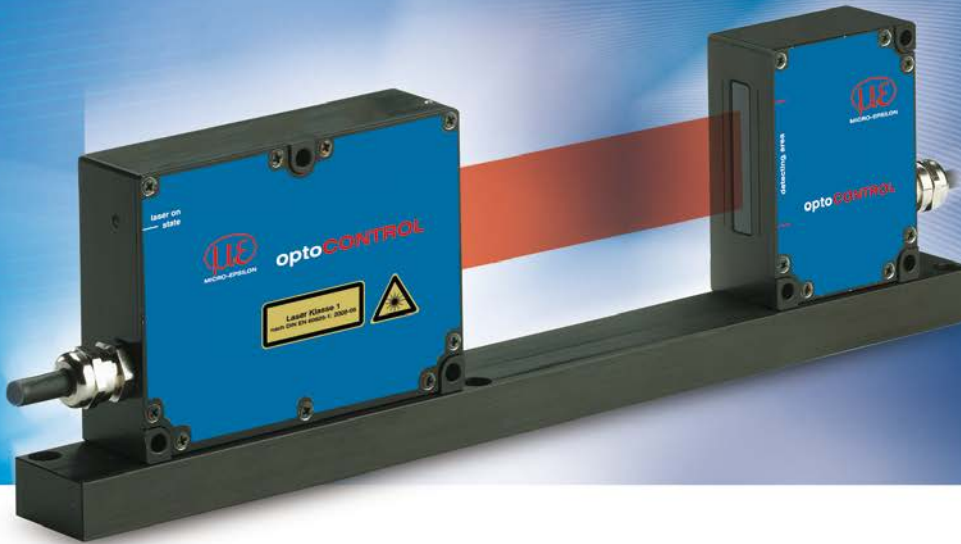

	Measuring range 34mm
	Resolution 1µm
	Measuring rate 2.3kHz
	Linearity <math><10\mu\text{m}</math>
Analog	Analog output 0 ... 10VDC
Serial	Serial interface RS232/RS422
	Laser class 1

- ▶ High resolution and precision
- ▶ Measuring rate 2.3kHz for fast processes
- ▶ Laser-ThruBeam technology
- ▶ Six different measuring programs

Measuring principle



optoCONTROL 2500 is a laser-based measuring system with integrated high resolution CCD camera. The Thru-Beam micrometer measures the dimension of an object or the position of an edge by using the shadow-casting principle. The data obtained with various, selectable measuring programs is output via analog and digital interfaces. Thanks to the high measuring rate, the outstanding accuracy and excellent resolution, the laser micrometer is ideally suited to precision measurement and inspection tasks on moving products in production lines.

System design

optoCONTROL 2500 consists of a sensor unit and a controller. The sensor unit comprises a laser light source (transmitter) and a CCD camera (receiver). A parallel light curtain is produced with the laser light source. The CCD array in the receiver measures the contour formed by shadow casting of the measurement object with high accuracy. The sensor unit is controlled and evaluated by an intelligent controller with graphical display for operation and display of the measured values.

Predefined measurement modes

(six individual programs can be selected)

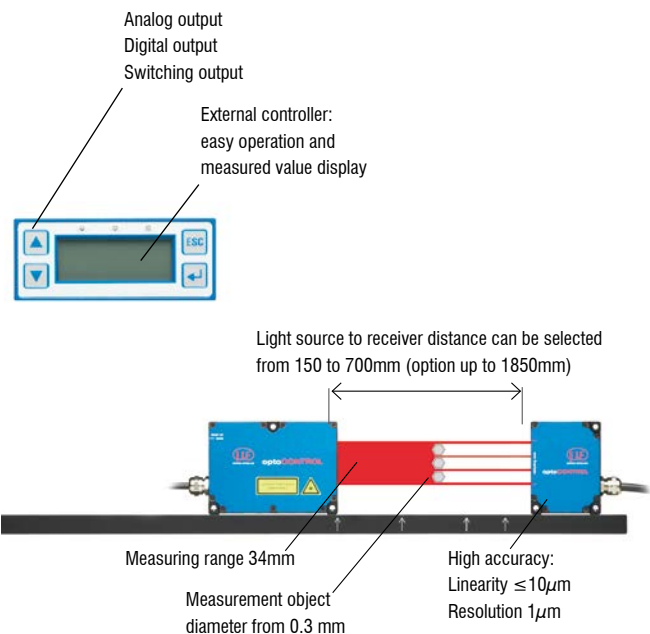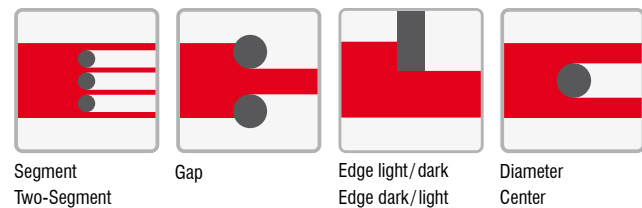

Model	ODC 2500-35	
Measuring range	34mm	
Smallest diameter or gap (detectable target)	typ. $\geq 0.3\text{mm}$	
Distance light source - receiver	300mm (150mm - 700mm) (Option up to 1850mm) ¹⁾	
Distance (target to receiver)	20 ... 150mm	
Linearity ²⁾	$\leq 10\mu\text{m}$	
Resolution ³⁾	$1\mu\text{m}$	
Repeatability	$\leq 3\mu\text{m}$	
Measuring rate	2.3kHz	
Light source	Semiconductor laser 670nm, class 1	
Analog output	0 ... 10V, range -10 ... +10V	
Digital output	RS 232 or RS 422	
Switching output	1 x error, 2 x limit, 2 x warning; LC-display, 3 x LED; Sync-Out	
Input	Sync-In; zero; Laser On/Off	
Shock	acc. IEC 68-2-29	
Vibration	acc. IEC 68-2-6	
Operation temperature	0°C to 50°C	
Storage temperature	-20°C to 70°C	
Power supply	24VDC ($\pm 15\%$)	
Cable length	2m (option: extension 3m / 8m)	
Protection class	receiver / light source	IP 64
	controller	IP 40
Display	LCD-display (value, maximum, minimum, peak-to-peak) display in mm or inch, selectable; menu languages in german / english, selectable; 3x LED (power on, light on, error)	
Measuring programs	diameter, gap, position / edge, segment, two-segment	

All specifications are measured at a constant temperature of 20 °C after a warm-up time of 30 minutes.


¹⁾ If distances increase, linearity and resolution may decline

²⁾ Valid for distance of the target to receiver $20 \leq 5\text{ mm}$; distance light source - CCD-camera 150mm

³⁾ Display resolution

Customer specific versions

- Carry case version for service tasks
- Customized cable lengths, modified cable outlet
- Version with reduced light source to receiver gap
- Version with deflection mirror for installation in restricted, tight spaces
- OEM measuring programs adaption

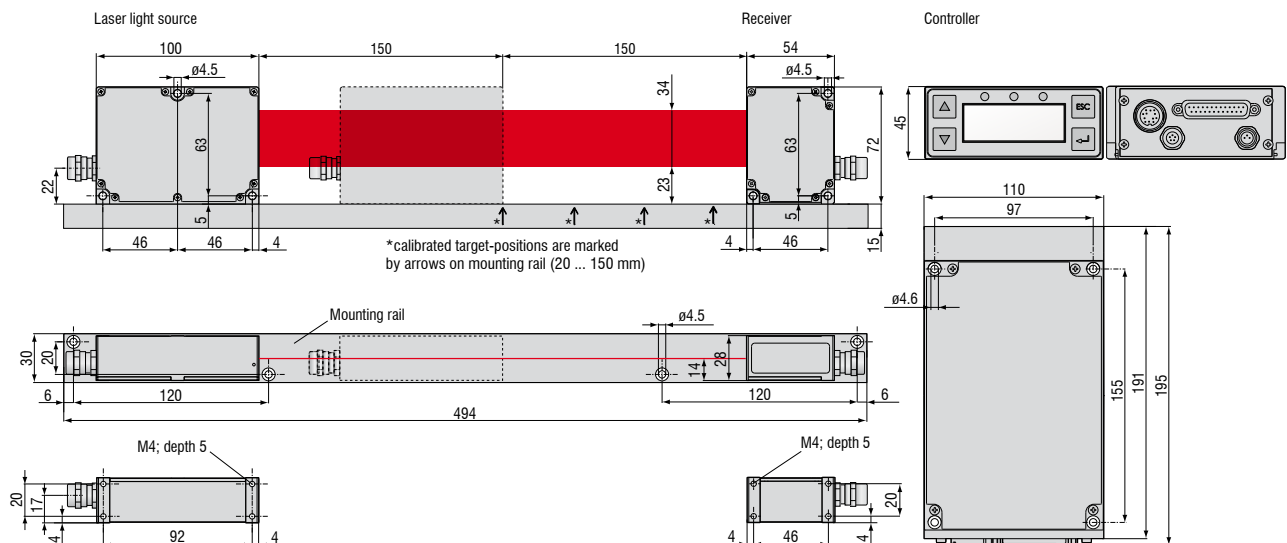



- ▶ Distance-independent measurement
- ▶ Output of several measuring values at the same time
- ▶ Triggering and synchronisation
- ▶ Measurement view including limit values
- ▶ Statistics as well as many averaging and filtering modes
- ▶ Simple setting by video signal
- ▶ Display of light and dark edges
- ▶ Measures up to 8 segments simultaneously



Compact laser micrometer for large distances

optoCONTROL 2520 is a compact laser micrometer which stands out due to a high accuracy with a maximum measuring range of 46mm. optoCONTROL 2520 is flexible in use. Therefore, the measurement object can be in any position within the light curtain and the distance from the transmitter to the receiver may be chosen freely. The smallest detectable diameter of the measurement object is about 0.5mm whereby for example PINs or small gaps can be measured. optoCONTROL 2520 can also be used for counting tasks and roundness measurement.

RS422 as well as Ethernet / EtherCAT are available as interfaces. The configuration is performed via a comfortable web interface. Thereby, measured values and limiting values can be shown in a simple way, measuring programs may be chosen and filters be applied easily. Apart from this, a video signal is provided for the measurement setting.

Measuring modes

The center line as well as the position of the single edges can be output for every segment, gap or diameter.

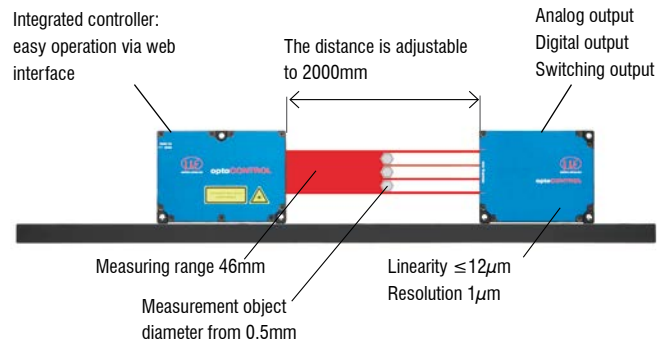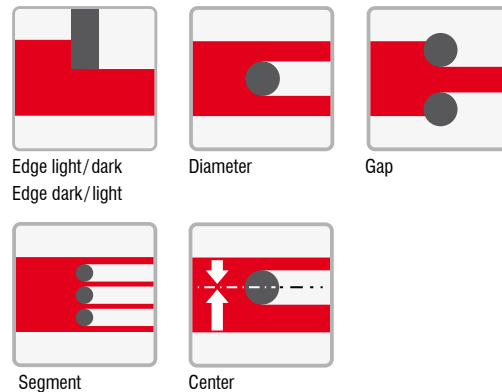



Modell	ODC 2520	
Measuring range	46mm	
Smallest diameter or gap	typ. $\geq 0.5\text{mm}$	
Distance light source - receiver (free space)	with mounting rail 100 ... 300mm; without mounting rail up to approx. 2m	
Distance (target to receiver)	20mm, max. 1500 ... 2000mm	
Linearity (3σ) ^{1) 2)}	$< 12\mu\text{m}$	
Digital resolution	$1\mu\text{m}$	
Repeatability ¹⁾	$\leq 5\mu\text{m}$	
Measuring rate	2.5kHz	
Light source	semiconductor laser 670nm (red), laser class 1M (P_{max} 2mW)	
Analog output	0 ... 10V not electrically isolated, 14Bit D/A	
Digital output	RS 422; max. 4 MBaud, full-duplex, not electrically isolated	
	Ethernet, electrically isolated	
	EtherCAT	
Switching outputs	2 outputs, selectable for error or limit values, not electrically isolated 24V logic (HTL), High level depends from operating voltage	
In-/Outputs	Zeroing / mastering, reset to factory setting; not electrically isolated, 24 V logic (HTL), High level depends on operating voltage	
	TrigIn / SyncIn / symmetrical SyncOut, RS422 level, load resistance (120 Ohm) and direction switchable via software, not electrically isolated	
Shock	15g / 6ms	
Vibration	2g / 20 ... 500Hz	
Operation temperature	0 ... 50°C	
Storage temperature	-20 ... 70°C	
Power supply	+24VDC (11...30VDC), < 1A	
Connector	receiver	3-pin connector M8 for supply of the light source; 14-pin connector M16 for power supply and signals; 4-pin connector M12x1 for Ethernet / EtherCAT
Display LEDs	receiver	Power on, Status, Speed, Link / activity
Protection class	receiver / light source	IP 64
Measuring programs	Edge light/dark; edge dark/light; (outer-) diameter/ width incl. center gap / (inner diameter) incl. center; Any segment edges incl. center	
Functions	averaging, filter; Threshold adjustment for transparent targets; edge detection and measurement direction reversible; current measuring value, Maximum, Minimum, Peak to Peak; edge / level / software triggering synchronization, counting function	
Operation, measured value display	Web interface for parametrisation and display (incl. measurement server for transmitting multiple measuring values to the PC)	

All specifications are measured at a constant temperature of 20 °C, sensor in continuous operation.

¹⁾ Distance light source - receiver 300mm, distance target - receiver 20mm and 50mm, mode: edge light/dark

²⁾ Measured at static noise for 3 min.

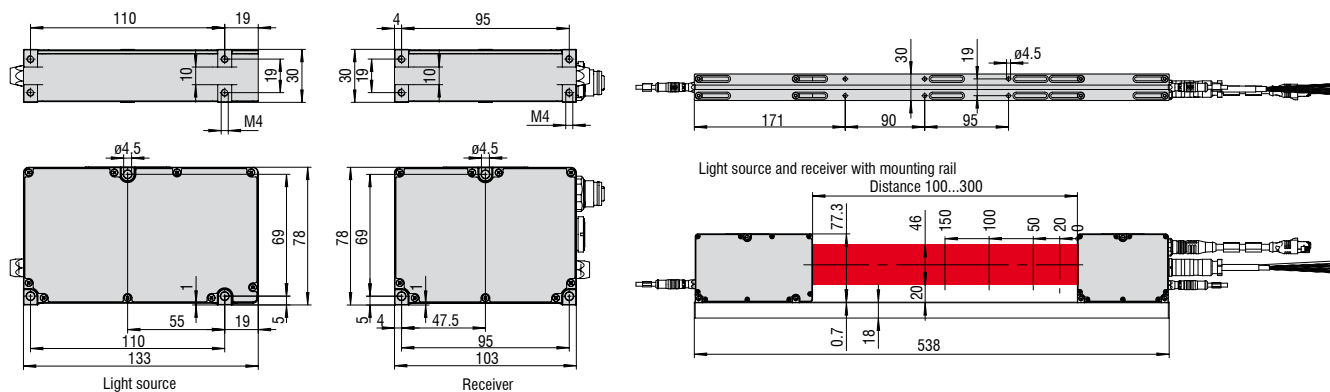

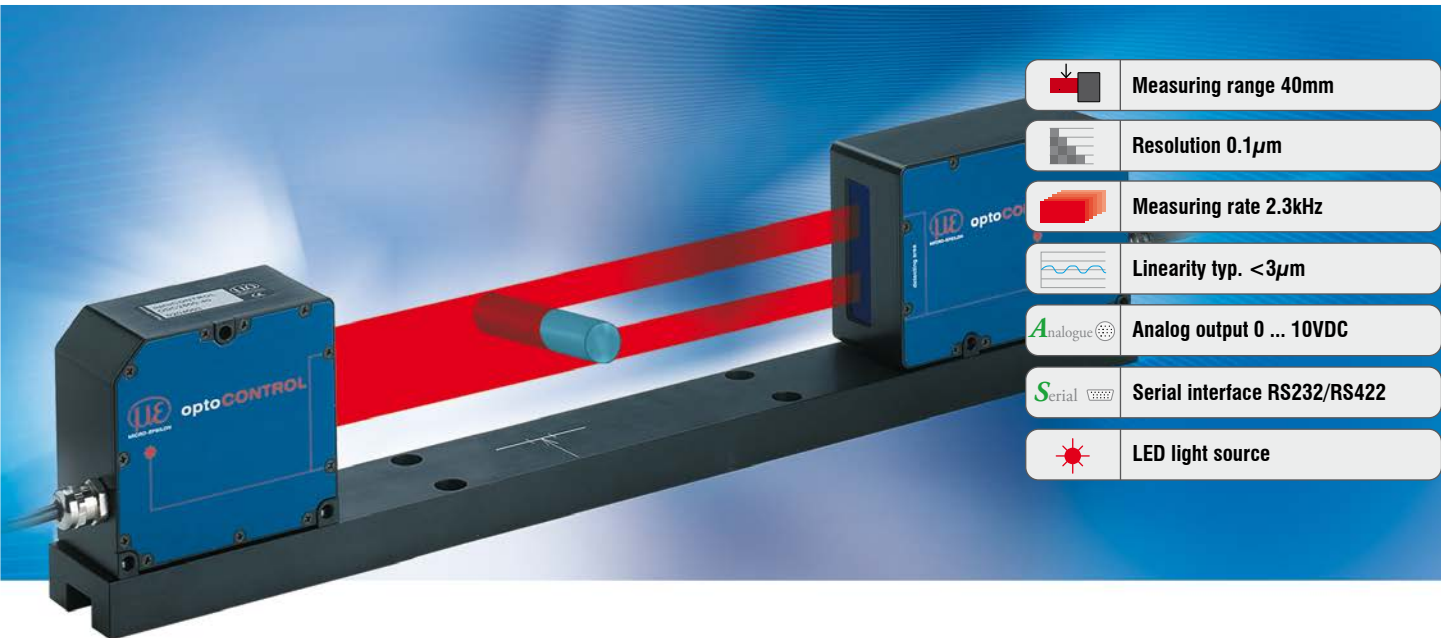

- ▶ Maximum resolution and accuracy
- ▶ Outstanding repeatability
- ▶ Measuring rate 2.3kHz for fast processes
- ▶ Insensitive to external light
- ▶ Measurement against glass and transparent plastics
- ▶ Six different measuring programs
- ▶ Measures up to 4 segments simultaneously (e.g. 4 x diameter)

Measuring principle




optoCONTROL 2600 is an optical measuring system with integrated high resolution CCD camera. Using a special lens arrangement, an LED light source produces a parallel light curtain (visible red light), which is imaged on the CCD camera via a telecentric lens. If an object to be measured is placed in the light curtain, the shadow it creates is detected by the CCD array. The measured data is output via analog and digital interfaces. The system is insensitive to high external light conditions.

System design

optoCONTROL 2600 consists of a sensor unit and a controller, which are attached to a mounting rail. The sensor unit comprises a light source with high power LED and a receiver with telecentric lens and CCD array. The sensor unit is controlled and evaluated by an intelligent controller with graphical display for operation and display of the measured value. The adjustable light source enables precise measurement of most transparent objects. Significantly higher accuracies and repeatability of measured data is made possible due to the combination of LED with telecentric lens arrangement. The system is insensitive to dirt and moisture.

Predefined measurement modes

(six individual programs can be generated)

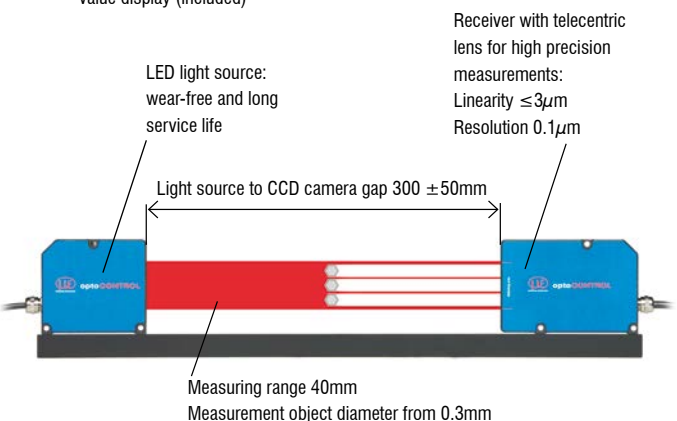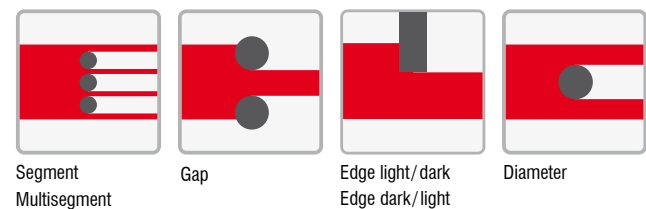

Model	ODC2600-40
Measuring range	40mm
Smallest diameter or gap (detectable target)	0.3mm
Distance light source - receiver (free space)	300 (±50)mm
Distance (target to receiver)	150 (±5)mm
Linearity (3σ) ¹⁾	<3μm
Resolution ²⁾	0.1μm
Repeatability ^{1) 3)}	≤1μm
Measuring rate	2.3kHz
Light source	red LED
Analog output (voltage)	0 ... 10VDC, range ≤10VDC, selectable ³⁾
Digital output	RS232 (115.2kBaud) or RS422 (691.2kBaud)
Switching output	error, 4x limit, synchronization
Input	zero; reset; trigger; synchronization; light on/off (programmable)
Shock	acc. IEC 60068-2-29
Vibration	acc. IEC 60068-2-6
Operation temperature	0 to 50°C
Storage temperature	-20 to 70°C
Power supply	24VDC (±15%), <1A
Cable length (controller-light source / controller-CCD-camera)	standard: 2m
Protection class	receiver / light source controller
	IP 64 IP 40
Measuring programs	edge light-dark; edge dark-light; diameter; gap; segment; multi-segments; 4 user-programs
Display	LC-display (value, maximum, minimum, peak-to-peak); display in mm or inch, selectable; menu languages in german / english, selectable; 3x LED (power on, light on, error)

All specifications are measured at a constant temperature of 20°C after a warm-up time of 30 minutes.


¹⁾ Edge measurement, no averaging at the target, operating distance 150 ±5mm) < ±3μm

²⁾ Display resolution (resolution digital output 0.6μm)

³⁾ Measured at static noise for 3 min.

Optional versions

- Carry case version for service tasks
- Customized cable lengths, modified cable outlet
- Customer-specific software (measuring programs, statistics)
- System for measurement of grooved surfaces
- System with reduced distance between transmitter and receiver

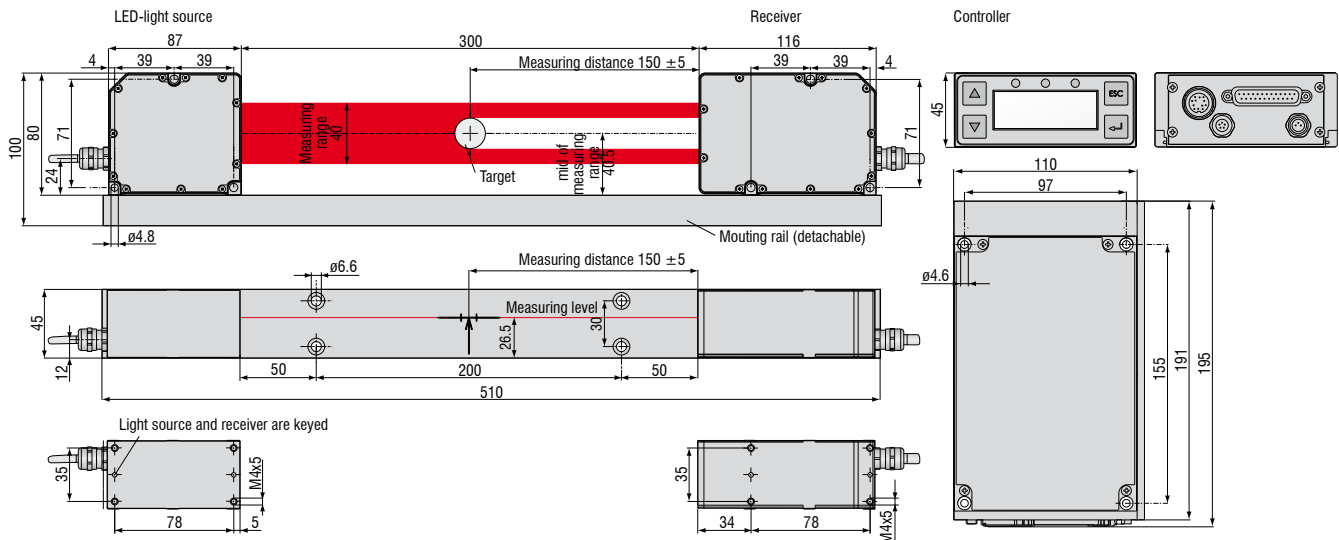

IF2008 - PCI interface card

Particular benefits

- 4x digital signals and two encoders with basic printed circuit board
- Additional expansion board for a total of 6x digital signals, 2x encoder and 2x analog signals and 8x I/O Signals
- FIFO data memory
- Synchronous data acquisition



Example: measurement of diameters with two optoCONTROL.
The diameter to be measured can be increased using two optoCONTROL. See CSP2008 universal controller.

IF2008E - Expansion board

Particular benefits

- Two digital signals, two analog signals and 8 I/O signals
- Overall with IF2008: 6 digital signals, 2 encoders and 2 analog signals and 8 I/O signals
- FIFO data memory
- Synchronous data acquisition




CSP2008 - Universal controller for up to six sensor signals

The controller CSP2008 has been designed to process 2 to 6 both optical and other sensors from Micro-Epsilon (6 digital or 4 analog input signals max., 2x internal + 4x external via EtherCAT modules from the company Beckhoff. EtherCAT is intended as external bus for connecting further sensors and I/O modules. The controller is equipped with a display offering multicolour backlighting which changes its colour in the case of exceeding the limit value while a signal is displayed.

Features

- Real-time processing of input and output signals at up to 100kHz (user selectable)
- Unique user interface for the configuration of the controller via Ethernet on a PC or laptop. All user selectable functions of the controller and the measured values can be viewed, displayed and stored in real time via your own web browser without installing any 3rd part software
- Simple sensor connection with automatic sensor recognition, configuration of the sensor using buttons and display on controller or via web browser
- Modular system upgradable with additional I/O modules for customer-specific requirements. The internal communication between I/O components using EtherCAT connection (CSP 2008 acts as master)
- Extremely flexible and powerful functionality; function modules can be combined in many ways
- Simple mounting using DIN rail TS 35

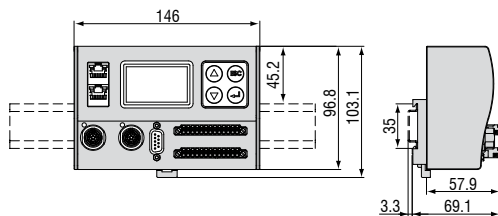

Universal controller with DIN rail TS 35
(dimensions not to scale)

Accessories optoCONTROL 1200/1201

Art.-Nr.	Model	Description
2901260	PC1200-5	Power supply and signal cable 5m, straight connector, for light source and receiver unit
2901483	PC1200-10	Power supply and signal cable 10m, straight connector, for light source and receiver unit
2901261	PC1200/90-5	Power supply and signal cable 5m, angled connector, for light source and receiver unit
0260031.11	DD241PC(11)-U	Digital display unit, RS232, connection for 1 analogue sensor 0-10V, 2 limit switches

Accessories optoCONTROL 1202

2901497	CE1202-2	Connecting cable light source-receiver, 2m
2901482	CE1202-5	Connecting cable light source-receiver, 5m
2901371	SCD1202-2-RS232	Digital output cable, 2m, for connection to a RS232 port
2901509	SCD1202-5-RS232	Digital output cable, 5m, for connection to a RS232 port
2901848	SCD12xx-2-USB	Digital output cable for USB connection incl. driver, 2m
2901373	SCA1202-2	Power supply and analogue output cable, 2m
2901510	SCA1202-5	Power supply and analogue output cable, 5m
2966006	ODC1202-L100	Mounting rail for ODC1202, 400mm; distance light source/receiver max. 100mm
2966007	ODC1202-L200	Mounting rail for ODC1202, 500mm; distance light source/receiver max. 200mm
2966008	ODC1202-L500	Mounting rail for ODC1202, 800mm; distance light source/receiver max. 500mm
6414114	EK1100/CSP2008	Bus terminal
6414107	EL3162/CSP2008	Bus terminal; 2-channel analogue input terminal
2420057	CSP2008	Universal controller for displacement sensors

Accessories optoCONTROL 1220

2901871	CE1220-1	Connecting cable light source-receiver, 1m
2901851	CE1220-2	Connecting cable light source-receiver, 2m
2901852	CE1220-5	Connecting cable light source-receiver, 5m
2901371	SCD1202-2-RS232	Digital output cable, 2m, for connection to a RS232 port
2901509	SCD1202-5-RS232	Digital output cable, 5m, for connection to a RS232 port
2901848	SCD12xx-2-USB	Digital output cable for USB connection incl. driver, 2m
2901373	SCA1202-2	Power supply and analogue output cable, 2m
2901510	SCA1202-5	Power supply and analogue output cable, 5m
2966009	ODC1220-L220	Mounting rail for ODC1220, 400mm; distance light source/receiver max. 220mm
6414114	EK1100/CSP2008	Bus terminal
6414107	EL3162/CSP2008	Bus terminal; 2-channel analogue input terminal
2420057	CSP2008	Universal controller for displacement sensors

Accessories optoCONTROL 2500/2600

2901123	PC2500-3	Power supply cable 3m, open
2901124	PC2500-10	Power supply cable 10m, open
2901120	SCA2500-3	Signal output cable, analogue, 3m
2901215	SCA2500-10	Signal output cable, analogue, 10m
2901121	SCD2500-3/3/RS232	Signal output cable, 3m, analogue / RS232
2213017	IF2008	PCI interface card RS422
2213018	IF2008E	Expansion board analogue / RS422 / PCI
2901122	SCD2500-3/10/RS422	Signal output cable, 3m, analogue / RS422, 10m
2901057	CE1800-3	Sensor cable extension for camera, 3m
2901118	CE2500-3	Sensor cable extension for light source, 3m
2901058	CE1800-8	Sensor cable extension for camera, 8m
2901119	CE2500-8	Sensor cable extension for light source, 8m
2420057	CSP2008	Universal controller for up to six sensor signals
2901504	SCD2500-3/CSP	Output cable, 3m, for connection to CSP2008
2901505	SCD2500-10/CSP	Output cable, 10m, for connection to CSP2008
2964022	MBC300	Assembly block for controller ODC2500/2600
2213024		IF2004/USB 4 channel RS422/USB converter
2213022		Industrial converter for ILD-Sensors, RS-422/USB
2901528	IF2008-Y adaptation cable	Adaptation cable, Y-type, 100mm
6414071		Extension clamp RS422 to CSP2008

Accessories optoCONTROL 2520

2901925	SCD2520-3	Digital output cable, 3m, RJ45/ Ethernet/EtherCAT
29011002	SCD2520/90-5	Digital output cable, 5m, RJ45/ Ethernet/EtherCAT
29011042	SCD2520/90-8	Digital output cable, 8m, RJ45/ Ethernet/EtherCAT
29011003	PC/SC2520/90-5	Supply-, interface- and signal cable, 5m
2901918	PC/SC2520-3	Supply-, interface- and signal cable, 3m
29011037	PC/SC2520-10	Supply-, interface- and signal cable, 10m
29011038	PC/SC2520-20	Supply-, interface- and signal cable, 20m
29011039	PC/SC2520-30	Supply-, interface- and signal cable, 30m
29011040	SCD2520-5 M12	Digital output cable Ethernet/EtherCAT, 5m
2901919	CE2520-1	Connecting cable light source-receiver, 1m
2901920	CE2520-2	Connecting cable light source-receiver, 2m
2901921	CE2520-5	Connecting cable light source-receiver, 5m
2901922	CE2520/90-1	Connecting cable light source-receiver, 1m
2901923	CE2520/90-2	Connecting cable light source-receiver, 2m
2901924	CE2520/90-5	Connecting cable light source-receiver, 5m
2901967	PC/SC2520-3/CSP	Interface and supply cable for CSP2008
29011014	PC/SC2520-3/IF2008	Interface and supply cable for IF2008
2213024	IF2004/USB	IF2004/USB 4fach RS422/USB Konverter
2213022		Industrial converter for ILD-Sensors, RS-422/USB
0260031.10	DD241PC(10)-U	Digital process display, 0...10V
0260031.11	DD241PC(11)-U	Digital process display, 2 limit switches, 0...10V
2213017	IF2008	PCI interface card RS422
2213018	IF2008E	Expansion board analogue / RS422 / PCI
2901528	IF2008-Y adaptation cable	Adaptation cable, Y-type, 100mm
2420057	CSP2008	Universal controller for displacement sensors
6414071		Extension clamp RS422 to CSP2008
6414114	EK1100/CSP2008	Bus terminal

Zubehör Netzteile

2420065	PS2030	Wall power supply 24V/24W/ 1A; 2m-PVC; clamp
2420062	PS2020	Power supply for DIN rail mounting 24VDC / 2.5A
2420042	PS2011	Power supply for laboratory use 230VAC/ 24VDC / 5.2A

Further cable lengths on request.



Laser radiation
Do not view directly with
optical instruments
Class 1M Laser Product
IEC 60825-1: 2008-05
 $P \leq 2\text{mW}$, $E \leq 0.2\text{mW/cm}^2$; $\lambda = 670\text{nm}$

optoCONTROL 2520 use a semiconductor class 1M laser with a wavelength of 670nm. The maximum optical output power is $\leq 2\text{mW}$. This laser class does not require any additional protection equipment. Be careful with the dazzling effect related to optical instruments.



Class 1 Laser Product
IEC 60825-1: 2008-05

optoCONTROL 12xx and 2500 use a semiconductor class 1 laser with a wavelength of 670nm. The maximum optical output power is $\leq 0.39\text{mW}$. This laser class does not require any additional protection equipment.

THIS PRODUCT COMPLIES
WITH FDA REGULATIONS
21CFR 1040.10 AND 1040.11

High performance sensors made by Micro-Epsilon



Sensors and systems for displacement and position



Sensors and measurement devices for non-contact temperature measurement



2D/3D profile sensors (laser scanner)



Optical micrometers, fiber optic sensors and fiber optics



Color recognition sensors, LED analyzers and color online spectrometer



Measurement and inspection systems